

# HEAT CARRY™

FOR MATERIAL TEMPERATURES  
UP TO **850°F**

**BANDO**

**ULTRA HIGH HEAT AND ABRASION  
RESISTANT CONVEYOR BELTS**

— S I N C E 1 9 0 6 —

Bando's ultra high heat and abrasion resistant conveyor belt lineup, is specifically designed and compounded to yield exceptionally long service life. Heat Carry™ conveyor belts are used in applications where extreme material temperatures (up to 850°F) are expected and wear resistant product is a must.

## Applications

- **Cement plants (clinker, cement products, dry clay, etc.)**
- **Steel mills (sintered ore, coke, pellets, slag, etc.)**
- **Foundries**
- **Taconite**

## Features


1. **Superior resistance to heat and abrasion**
2. **Molded edged belts manufactured to width**
3. **Dependable vulcanized splices**

## Performance

1. **Handles material temperatures up to 850°F**
2. **Superior adhesion between the cover rubber and core body when exposed to heat**
3. **Lasts up to 50% longer than conventional heat resistant belt**


### Crack Life Evaluation

Service life comparison on a foundry sand conveyor line.  
(Belt surface temperature 500°F max.)

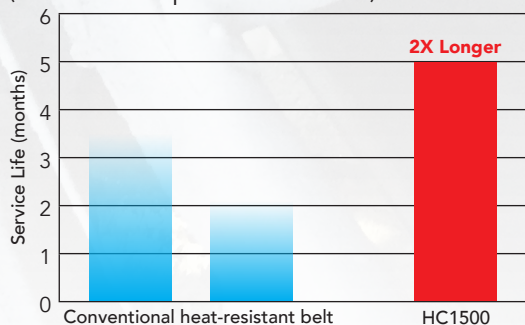

### Wear Evaluation


Remaining cover rubber thickness on a sintered ore conveyor line.

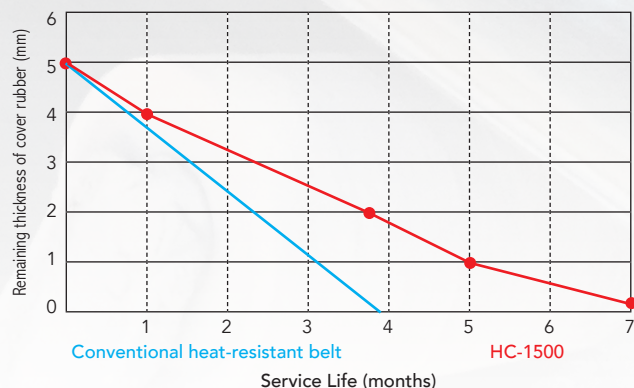

# Less Down Time = Lower Cost/Ton

In a field test, Bando Heat Carry™, outlasted a competitor by 4 months.

- Reduced the amount of belt changes from 12 down to 3
- Annual cost savings is substantial

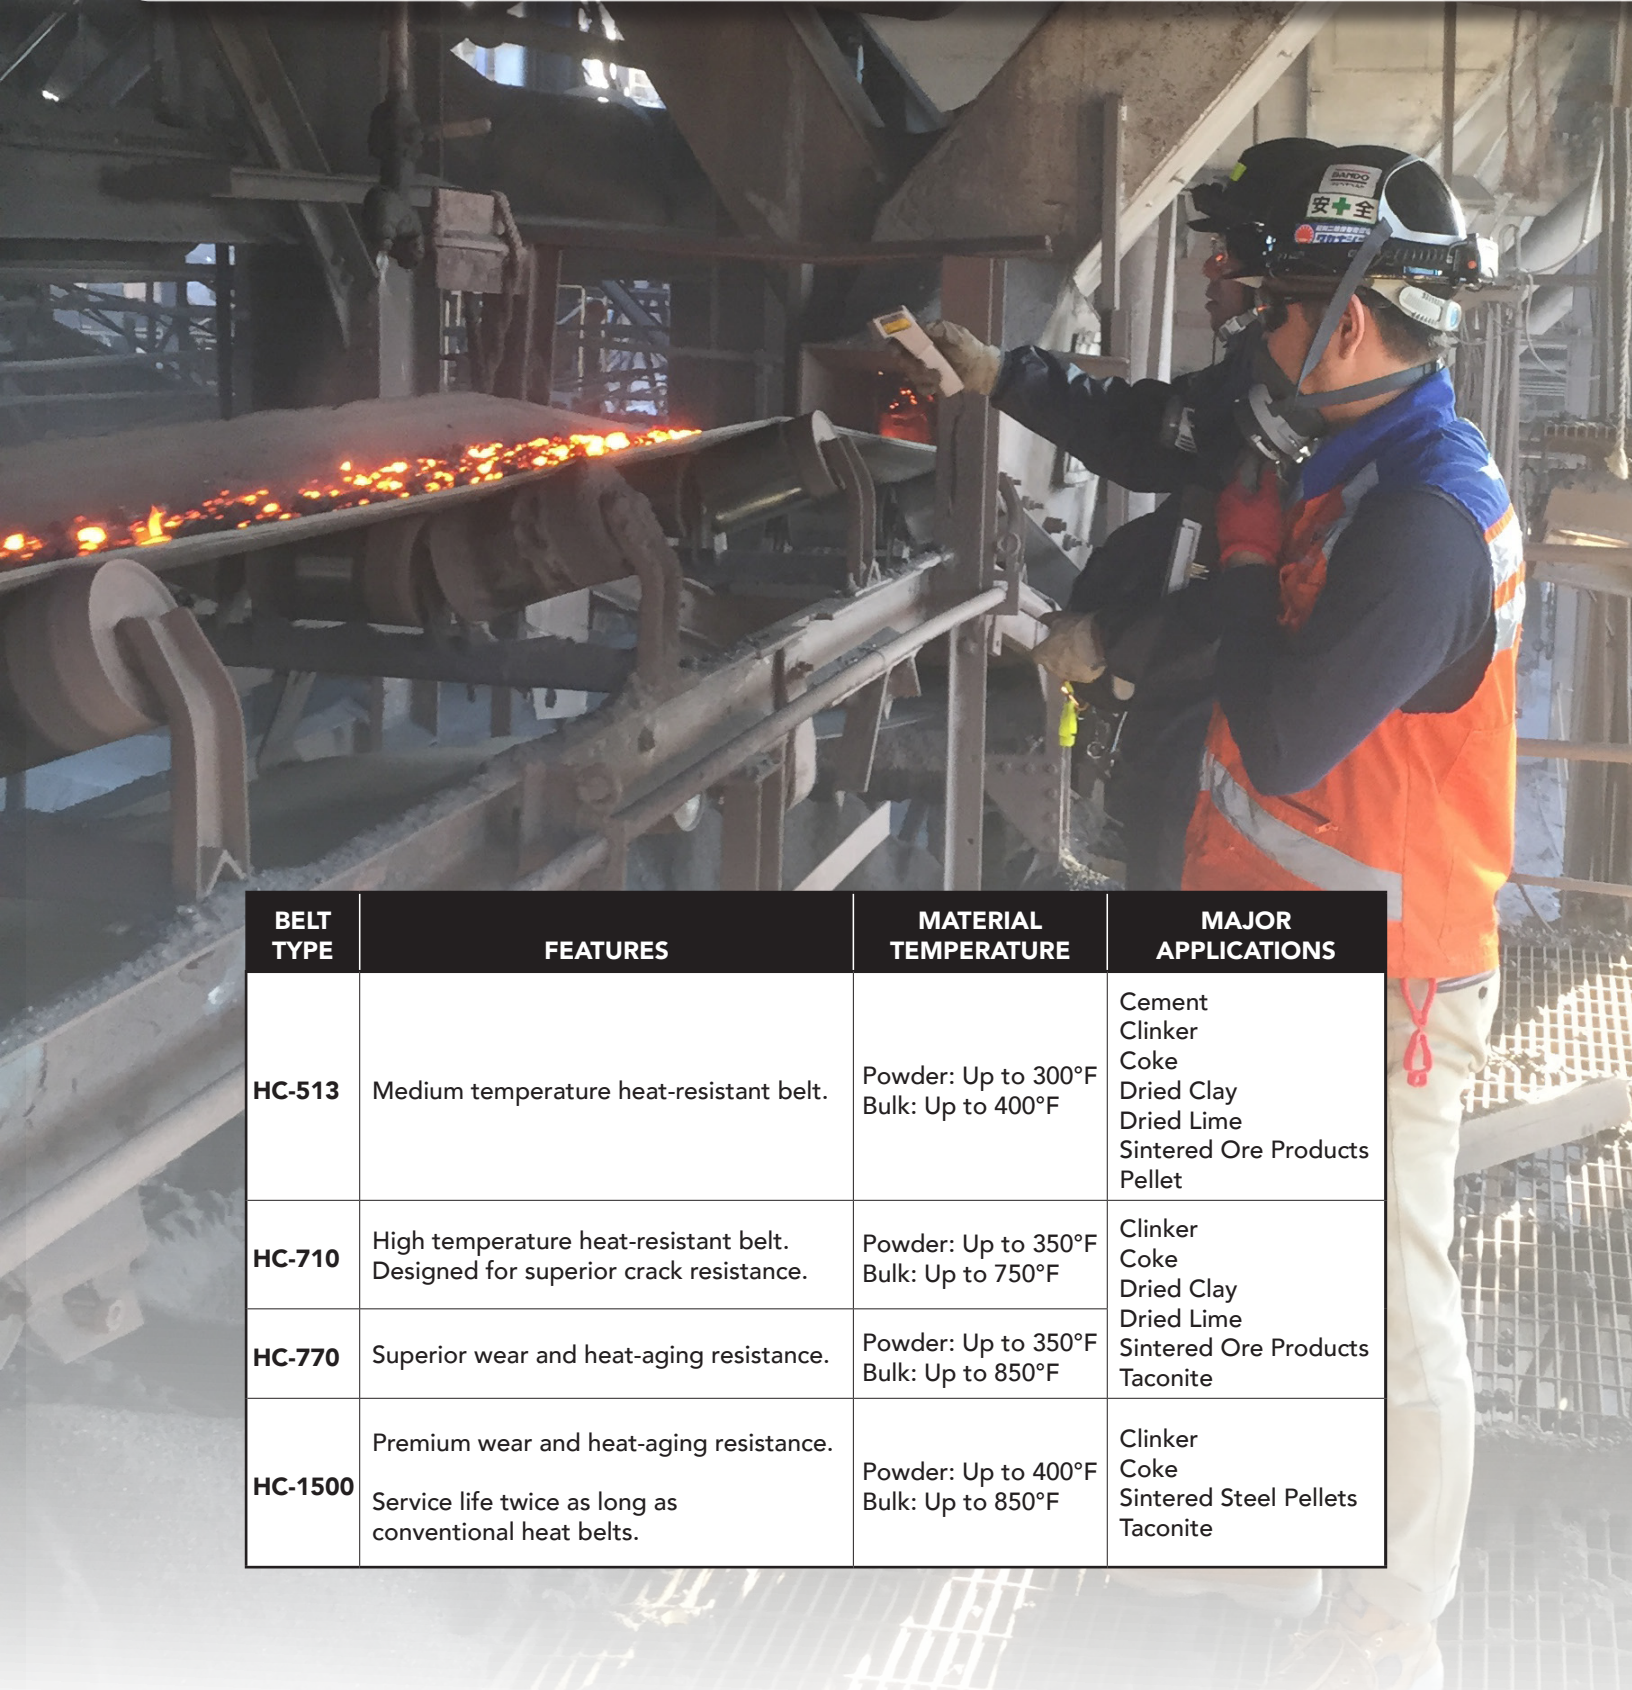

BELT TYPE	FEATURES	MATERIAL TEMPERATURE	MAJOR APPLICATIONS
HC-513	Medium temperature heat-resistant belt.	Powder: Up to 300°F Bulk: Up to 400°F	Cement Clinker Coke Dried Clay Dried Lime Sintered Ore Products Pellet
HC-710	High temperature heat-resistant belt. Designed for superior crack resistance.	Powder: Up to 350°F Bulk: Up to 750°F	Clinker Coke Dried Clay Dried Lime
HC-770	Superior wear and heat-aging resistance.	Powder: Up to 350°F Bulk: Up to 850°F	Sintered Ore Products Taconite
HC-1500	Premium wear and heat-aging resistance. Service life twice as long as conventional heat belts.	Powder: Up to 400°F Bulk: Up to 850°F	Clinker Coke Sintered Steel Pellets Taconite

**WORLD-WIDE MANUFACTURING • WORLD CLASS QUALITY**

**Bando Chemical Industries, Ltd.  
produced the first conveyor belts  
made in Japan.**

**Bando has been a pioneer in conveyor belt  
production, and has developed facilities and  
technologies, which have contributed to conveyor  
belt production in Japan at world-class levels.**

**Our efforts are now directed at  
environmental-friendly production and  
technological development, along with systems  
rationalization and labor savings to offer  
environment-friendly and safe products.**

Distributed by:



3<sup>rd</sup> Edition

Customer Service: 800-829-6612 | [BandoUSA@bandogrp.com](mailto:BandoUSA@bandogrp.com) | [www.BandoUSA.com](http://www.BandoUSA.com) BUI 1065